


A Detail  
1 : 2

MODEL	THREAD SIDE PORT	A (mm)	B (mm)	C (mm)	VOLUME	WEIGHT (kg)	AREA (INSIDE)
24×72	2"NPT / -2"SOCKET / 2"BSP / -2"SOCKET	2168±15	1418	1018	473L	57.3	3.57 m <sup>2</sup>

NOTE:

1. TEST METHOD FOR VESSEL PERFORMANCE COMPLIES WITH NSF/ANSI44-2002 "NSF INTERNATIONAL STANDARD/AMERICAN NATIONAL STANDARD"
2. MAXIMUM WORKING PRESSURE:10.5Bar, WATER MEDIUM TEMPERATURE RANGE: 1°C-49°C; NOT APPLICABLE TO CORROSIVE LIQUID;
3. DIMENSIONAL TOLERANCE: SJ1372-78, GRADE 8.
4. TANK IS SUPPLIED WITH ADAPTOR:

2"NPT MALE ADAPTOR / 1½"SOCKET ADAPTOR  
2"BSP MALE ADAPTOR / 50MM SOCKET ADAPTOR

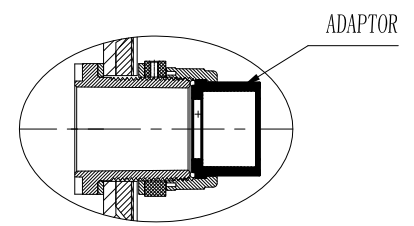

VERSION NO.	DESCRIPTION OF CHANGES:		SIGNATURE	DATE
	REFERENTIAL PLASTIC SHRINKAGE (IF NECESSARY):			
SIGNATURE		WAVE CYBER (SHANGHAI) CO., LTD.		
DESIGN	NAME			
INSPECTION			SCALE	MATERIAL
APPROVAL			MODEL	DESCRIPTION
THIS PRODUCT DRAWING CAN NOT BE COPIED AND/OR USED WITHOUT PRIOR WRITTEN APPROVAL OF WAVE CYBER.			QUANTITY	WEIGHT
			PROJECTION	COMPUTER CODE
DO NOT MEASURE THE DIMENSIONS.			UNIT: MM	TOTAL PAGE: 1